


PROPERTY SURVEY FOR  
**R.N. INDUSTRIES, INC.**  
SECTIONS 4 & 9, TOWNSHIP 2 SOUTH, RANGE 2 WEST  
UTAH SPECIAL BASE AND MERIDIAN

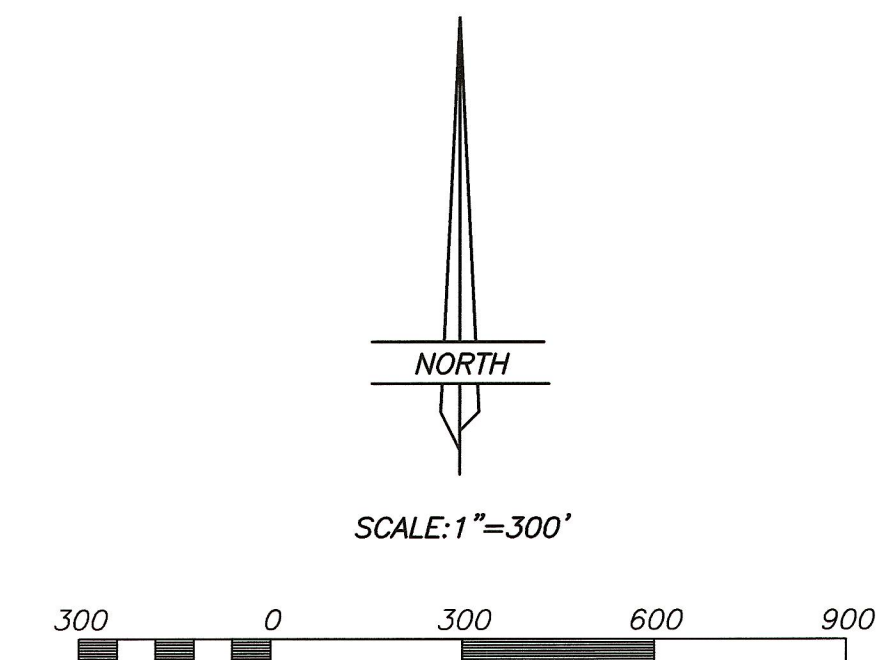

DESCRIPTION OF PARCEL

Beginning at the Southwest Corner of Section 4, Township 2 South, Range 2 West of the Utah Special Base and Meridian;  
Thence North 00°15'38" West 2570.28 feet along the West line of the SW1/4 of said Section 4;  
Thence South 89°56'35" East 1284.78 feet parallel with the North line of said SW1/4 to a fence corner;  
Thence North 89°56'21" East 1277.08 feet along an existing fence;  
Thence South 00°16'20" East 2005.73 feet along an existing fence;  
Thence South 18°36'20" West 594.46 feet along an existing fence;  
Thence South 36°38'51" West 1561.96 feet along an existing fence to a gate post;  
Thence North 65°21'44" West 60.69 feet;  
Thence North 56°12'53" West 381.02 feet;  
Thence North 58°02'00" West 119.79 feet;  
Thence South 64°54'02" West 227.18 feet;  
Thence South 79°01'58" West 110.39 feet;  
Thence North 90°00'00" West 665.64 feet to the West line of the NW1/4 of Section 9;  
Thence North 00°49'49" East 1068.84 feet along said West line to the Point of Beginning, containing 198.78 acres.

NARRATIVE

This survey was performed at the request of Mr. Roger Chapman of R.N. Industries for the purpose of establishing the position of the boundary line as shown and described on this plat. The monuments indicated were found and used as shown.


LEGEND AND NOTES

THIS SURVEY WAS PERFORMED USING G.P.S. (GLOBAL POSITIONING SYSTEM) PROCEDURES AND EQUIPMENT. THE BASIS OF BEARINGS WAS BASED ON WGS-84 DATUM.


- 1/2"x24" REBAR WITH CAP STAMPED 148951 FOUND BY THIS SURVEY
- MONUMENT SPIKES FOUND BY THIS SURVEY

SURVEYOR'S CERTIFICATE

This is to certify that I have surveyed the parcel of land shown on this plat, and that the monuments indicated were found or set during said survey, and that this plat accurately represents said survey to the best of my knowledge.



11 Mar '04  
Jerry D. Allred, Licensed Land Surveyor,  
Certificate 148951 (Utah)

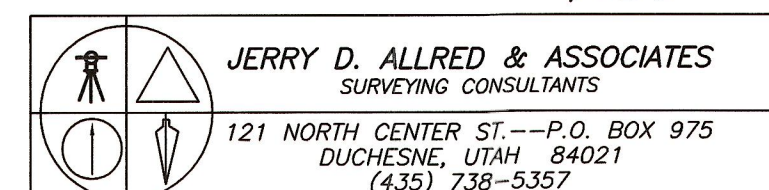

11 MAR 2004 88-129-010

LINE	BEARING	DISTANCE
L1	S 58°02'00" E	119.79'
L2	S 32°50'21" W	291.85'
L3	N 80°47'45" E	267.76'
L4	N 01°40'28" E	234.19'
L5	N 79°01'58" E	110.39'
L6	N 64°54'02" E	227.18'